

DATATRAC 400H Setup Instructions To Clear GPS NVM

Contents


Set up of the Data track.....	1
Transmitter SETUP.....	1
Receiver SETUP.....	2
Label setup.....	3
Bus setup.....	4
End of Procedure.....	4

Set up of the Data track

Transmitter SETUP

1. Switch On/Off: **ON**
 - a. Press “**XMT**” Key
 - b. Press “**ENTER**” Key
 - i. “**TRANSMITTER SETUP**” page displays
2. On the “**TRANSMITTER SETUP**” page
 - a. On/Off: **ON**
 - b. Bus speed : **100**
 - c. Function: **KEY**
 - d. Equipment ID: **000**
 - e. Data Format: **HEX32**
 - f. Display Lines: **03**

Note: Use “**^**””**v**” to move to next/previous line
Use “**>**” To step through options

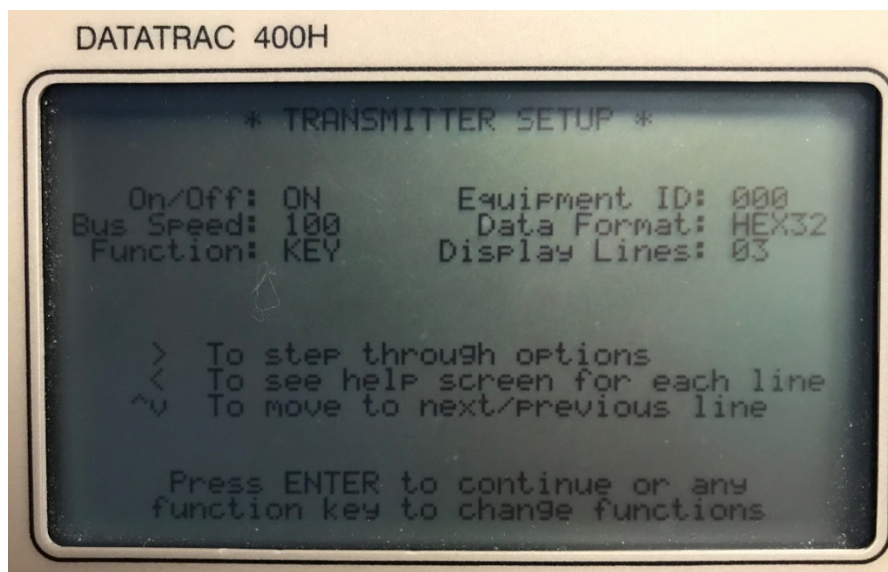

DATATRAC 400H Setup Instructions To Clear GPS NVM


Receiver SETUP

1. Press "RCV" Key
 - a. "RECEIVER SETUP" page displays
2. On the "RECEIVER SETUP" page
 - a. Channel: 1
 - b. On/Off: ON
 - c. Bus speed : 100
 - d. Select LBLs: EDIT
 - e. Equip ID: 000
 - f. Data Format: BIN19L
 - g. Interval: INST
 - h. RCV Download: NONE
 - i. Display Lines: 03
 - j. Bus Monitor: 2

Note: Use "^" "v" to move to next/previous line

Use ">" To step through options

Use Keypad to enter alphanumeric entries

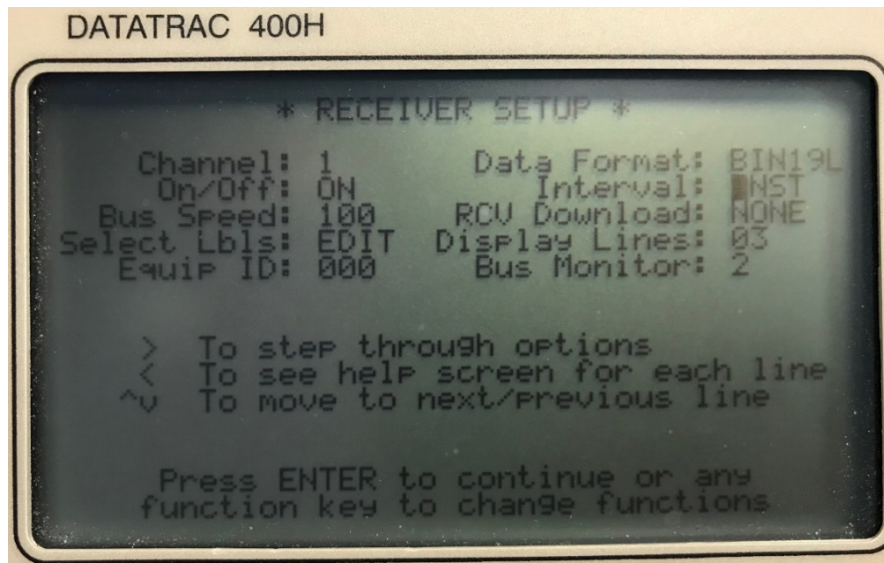

DATATRAC 400H Setup Instructions To Clear GPS NVM

Label setup


1. Navigate to "Select Lbls: EDIT"
 - a. Press "ENTER" Key
 - i. "SELECT LABEL SETUP" page displays
2. On the "SELECT LABEL SETUP" page
 - a. Enter Label : 150-D
 - b. Enter Label : 260-D

Note: Entry of D displays "X" (Example: 150-X)

Use ">" To step through options

Use "^" "v" to move to next/previous line

Use Keypad to enter alphanumeric entries

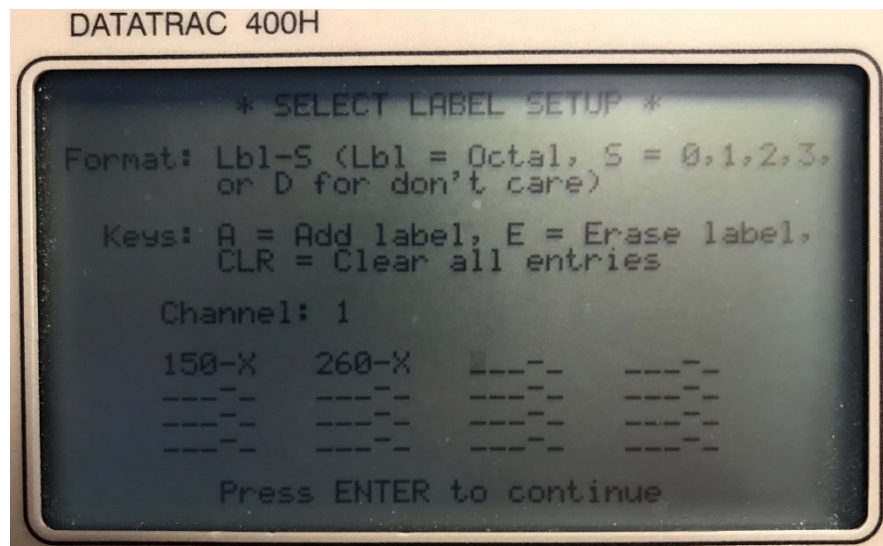

DATATRAC 400H Setup Instructions To Clear GPS NVM

Bus setup

1. Press "ENTER" Key
 - a. SELECT LABEL PAGE #2 page displays
2. On the "SELECT LABEL PAGE #2" page
 - a. Select "XMT" key
 - b. Enter values as displayed in the following table:


LBL	SDI	32 HEX DATA -1				SSM	Par	Msec
377	00	00	00	2C	FF	00	1	0040
047	00	80	04	80	E4	00	1	0040

Note: Page does not contain a title

Use ">" To step through options

Use "^" "v" to move to next/previous line

Use Keypad to enter alphanumeric entries

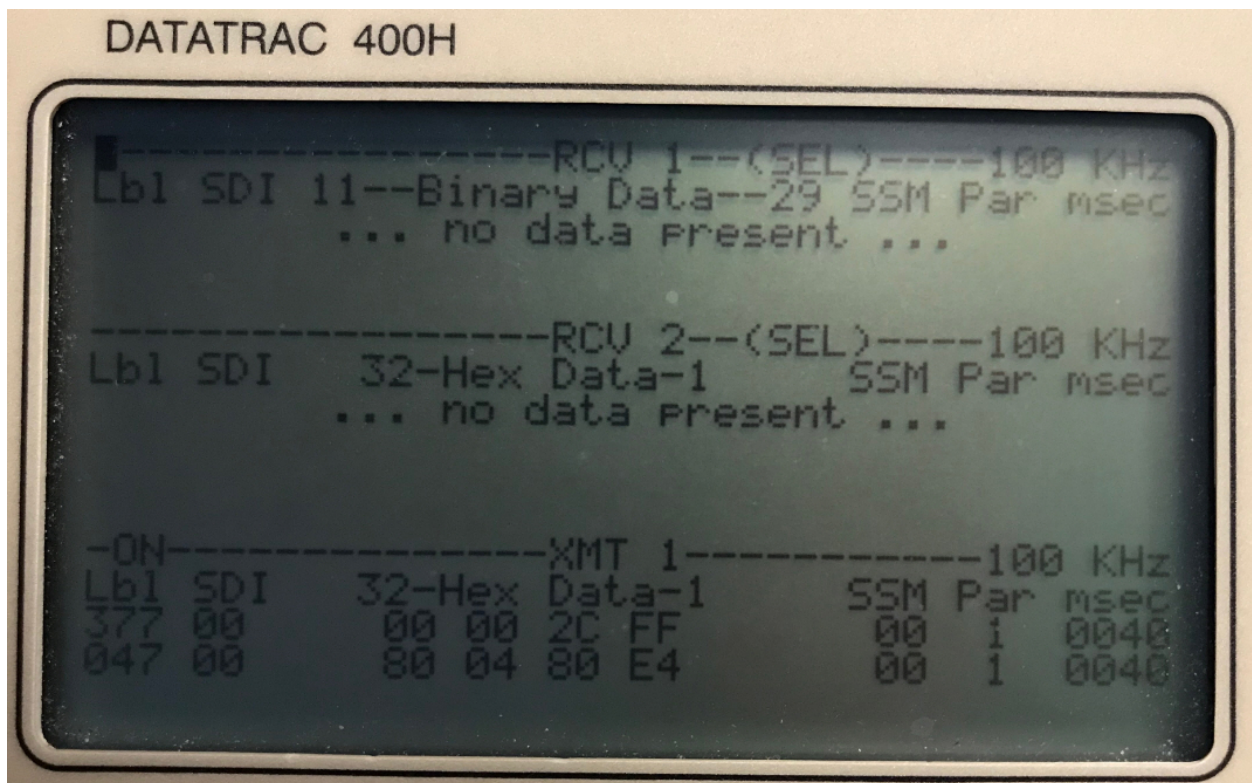

End of Procedure

1. Please refer to Service Information Letter 523-0826445 for complete NVM reset procedure.